

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

Subject:

GEA Commercial Compressors



Performance data

Application: Refrigeration & AC

Refrigerant	R404A, R507	Compressor refrigeration capacity	63.70 kW
Power supply	50 Hz, 400 V	Evaporator refrigeration capacity	63.70 kW
Supply frequency	50 Hz	Power consumption	25.00 kW
Evaporating temperature	5.0 °C	Current draw (400 V)	42.80 A
<i>Evaporating pressure (abs.)</i>	<i>7.06 bar</i>	Coefficient of performance (COP/EER)	2.54
Condensing temperature	50.0 °C	Condensing capacity	88.80 kW
<i>Condensing pressure (abs.)</i>	<i>22.98 bar</i>	Mass flow	0.600 kg/s
Suction gas temperature	20 °C	Discharge end temperature	80.9 °C ¹⁾
Subcooling (outside cond.)	0 K		
Usable superheat	100%		

Evaporation and condensing temperatures are based on the dew point values (saturated vapour conditions).

Certifications ²⁾



ASERCOM certified performance data

The performance data of compressors bearing this label has been certified to the strict requirements of ASERCOM.

ASERCOM is the Association of European Refrigeration Compressors and Controls Manufacturers. Information about the Association and the constantly updated overview of certified GEA compressors can be found at www.asercom.org.

This certification is based on EN 12900. This signifies: 20 °C suction gas temperature without liquid subcooling at 50 Hz power supply frequency.

Notes

- 1) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.
- 2) valid for 400V, 50Hz & application Refrigeration & AC

Subject to change without notice

To:

From:

04.02.2016
Page 1 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW


Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Operating limits

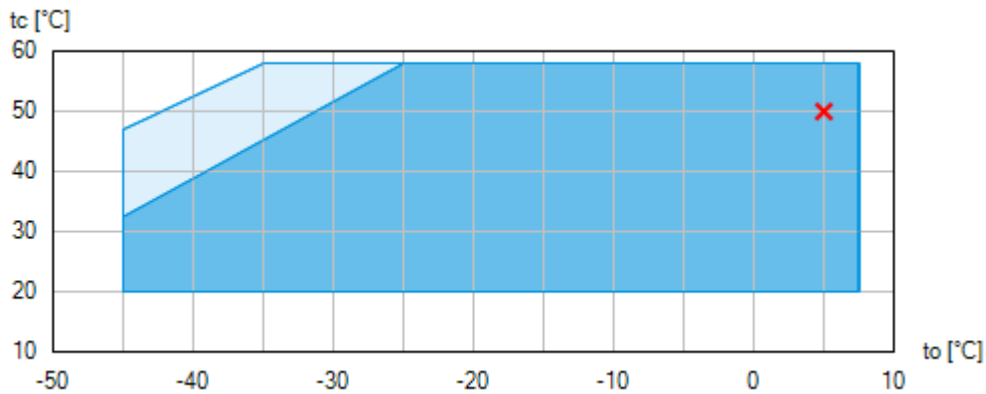

- Unlimited application range
- Supplementary cooling or reduced suction gas temperature ($\Delta t_{oh} < 20K$)

Compressor operation is possible within the limits shown on the diagrams of application. Please note the coloured areas. Compressor application limits should not be chosen for design purposes or continuous operation.

Subject to change without notice

To:

From:

04.02.2016
Page 2 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Technical data

Number of cylinders / Bore / Stroke	4 / 80 mm / 47 mm
Displacement 50/60 Hz (1450/1740 ¹ /min)	82,20 / 98,60 m ³ /h
Voltage ¹⁾	380-420V Y/YY -3- 50Hz PW
	440-480V Y/YY -3- 60Hz PW
Winding divided into	66% / 33%
Max. working current ²⁾	49.0 A
Max. power consumption ²⁾	28.6 kW
Starting current (rotor blocked) ²⁾	126.0 / 160.0 A
Motor protection	MP10
Protection terminal box	IP 65
Weight	205 kg
Max. permissible pressure (LP/HP) ³⁾	19 / 28 bar
Connection suction line SV	54 mm - 2 1/8 "
Connection discharge line DV	35 mm - 1 3/8 "
Lubrication	Oil pump
Oil type R134a, R404A, R407C/F, R507	FUCHS Reniso Triton SE 55
Oil type R22	FUCHS Reniso SP 46
Oil charge	3,6 Ltr.
Oil sump heater	230 V - 1 - 50/60 Hz, 140 W
Dimensions Length / Width / Height	830 / 435 / 405 mm

Notes

- 1) Tolerance ($\pm 10\%$) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

PW = part winding, motors for part winding starting
(no start unloaders required)
Designs for Y/D on request

- 2) - The stated value for the max. power consumption is valid for the adjusted power supply.
- Take account of the max. operating current / max. power consumption for designing fuses, supply lines and safety devices. Fuse: Consumption category AC3.
- Operation with EFC (available only for certain compressor types) may result into higher max. operating current / max. power consumption values.
- 3) LP = Low pressure
HP = High pressure

Subject to change without notice

To:

From:

04.02.2016
Page 3 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Performance data table

Application: Refrigeration & AC

Supply frequency: 50 Hz

Voltage: 400 V

Suction gas temperature: 20 °C

Subcooling (outside cond.): 0 K

tc [°C]		to [°C]									
		0	-5	-10	-15	-20	-25	-30	-35	-40	-45
30	Q [W]	77300	64400	53000	43100	34500	27200	20900	15700	11300	7560
	P [kW]	17.70	16.90	16.00	14.90	13.60	12.30	10.80	9.34	7.77	6.16
	I [A]	30.80	29.60	28.20	26.60	24.90	23.10	21.40	19.60	17.90	16.40
35	Q [W]	71300	59300	48700	39600	31600	24800	19100	14100	9950	6430
	P [kW]	19.10	18.10	17.00	15.70	14.20	12.70	11.10	9.44	7.71	5.96
	I [A]	33.00	31.50	29.70	27.80	25.80	23.70	21.70	19.70	17.90	16.20
40	Q [W]	65300	54200	44500	36000	28700	22500	17100	12600	8630	5260
	P [kW]	20.60	19.40	18.00	16.50	14.80	13.10	11.30	9.45	7.54	5.63
	I [A]	35.40	33.40	31.20	28.90	26.60	24.20	21.90	19.70	17.70	16.00
45	Q [W]	59200	49000	40100	32500	25800	20100	15200	11000	7280	4060
	P [kW]	22.00	20.60	18.90	17.20	15.30	13.40	11.40	9.33	7.25	5.16
	I [A]	37.70	35.30	32.70	30.00	27.30	24.60	22.00	19.60	17.40	15.60
50	Q [W]	53100	43900	35800	28900	22900	17700	13200	9300	5900	
	P [kW]	23.40	21.70	19.80	17.80	15.70	13.50	11.30	9.09	6.81	
	I [A]	40.10	37.20	34.10	31.00	27.90	24.80	22.00	19.30	17.00	

to Evaporating temperature

tc Condensing temperature

Q Compressor refrigeration capacity

P Power consumption

I Current draw

Subject to change without notice

To:

From:

04.02.2016

Page 4 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Scope of supply

Semi-hermetic four-cylinder reciprocating compressor with drive motor
Motor unit flanged onto the compressor housing

Oil pump

Winding protection with PTC resistor sensors and electronic trigger unit MP 10

Oil pump cover with screw-in option for oil differential pressure sensor DELTA-P II

Possibility of connection of oil level controllers ESK, AC+R or CARLY

Possibility of connection of oil level controllers Traxoil ¹⁾

Possibility for connection of oil pressure safety switch MP54

Oil charge:

HG: FUCHS Reniso SP 46

HGX: FUCHS Reniso Triton SE 55

Sight glass

Prepared for capacity regulator (1 cylinder cover)

Decompression valve

Suction and discharge line valve

Inert gas charge

4 anti-vibration pads enclosed

Accessories

Start unloader 230 V - 1 - 50/60 Hz, IP65, less check valve,
including thermal protection thermostat (posistor tracer)

Start unloader by means of a ESS (Electronic Soft Start), 400 V - 3 - 50/60 Hz, IP20 (Connection clamps IP00) for
installation in switch cabinet ²⁾

Capacity regulator 230 V - 1 - 50/60 Hz, IP65

1 capacity regulator = 50% residual capacity

Oil sump heater 230 V - 1 - 50/60 Hz, 140 W

Oil pressure safety switch MP54 230 V - 1 - 50/60 Hz, IP20 ²⁾

Oil differential pressure sensor DELTA-P II 220-240 V - 1 - 50/60 Hz ²⁾

Oil service valve

Thermal protection thermostat per cylinder cover ³⁾

Subject to change without notice

To:

From:

04.02.2016

Page 5 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Water-cooled cylinder covers

Sea water resistant water-cooled cylinder covers

Connection piece suction and discharge valve in welding design (on request)

Additional fan

230 V AC - 1 - 50 Hz, 97 W, IP44

230 V AC - 1 - 60 Hz, 128 W ²⁾

Intermediate adapter for discharge line valve

Special voltage and/or frequency (on request)

Notes

- 1) Only with additional adapter possible
- 2) Enclosure
- 3) Mounted

Subject to change without notice

To:

From:

04.02.2016
Page 6 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW


Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Dimensions and connections

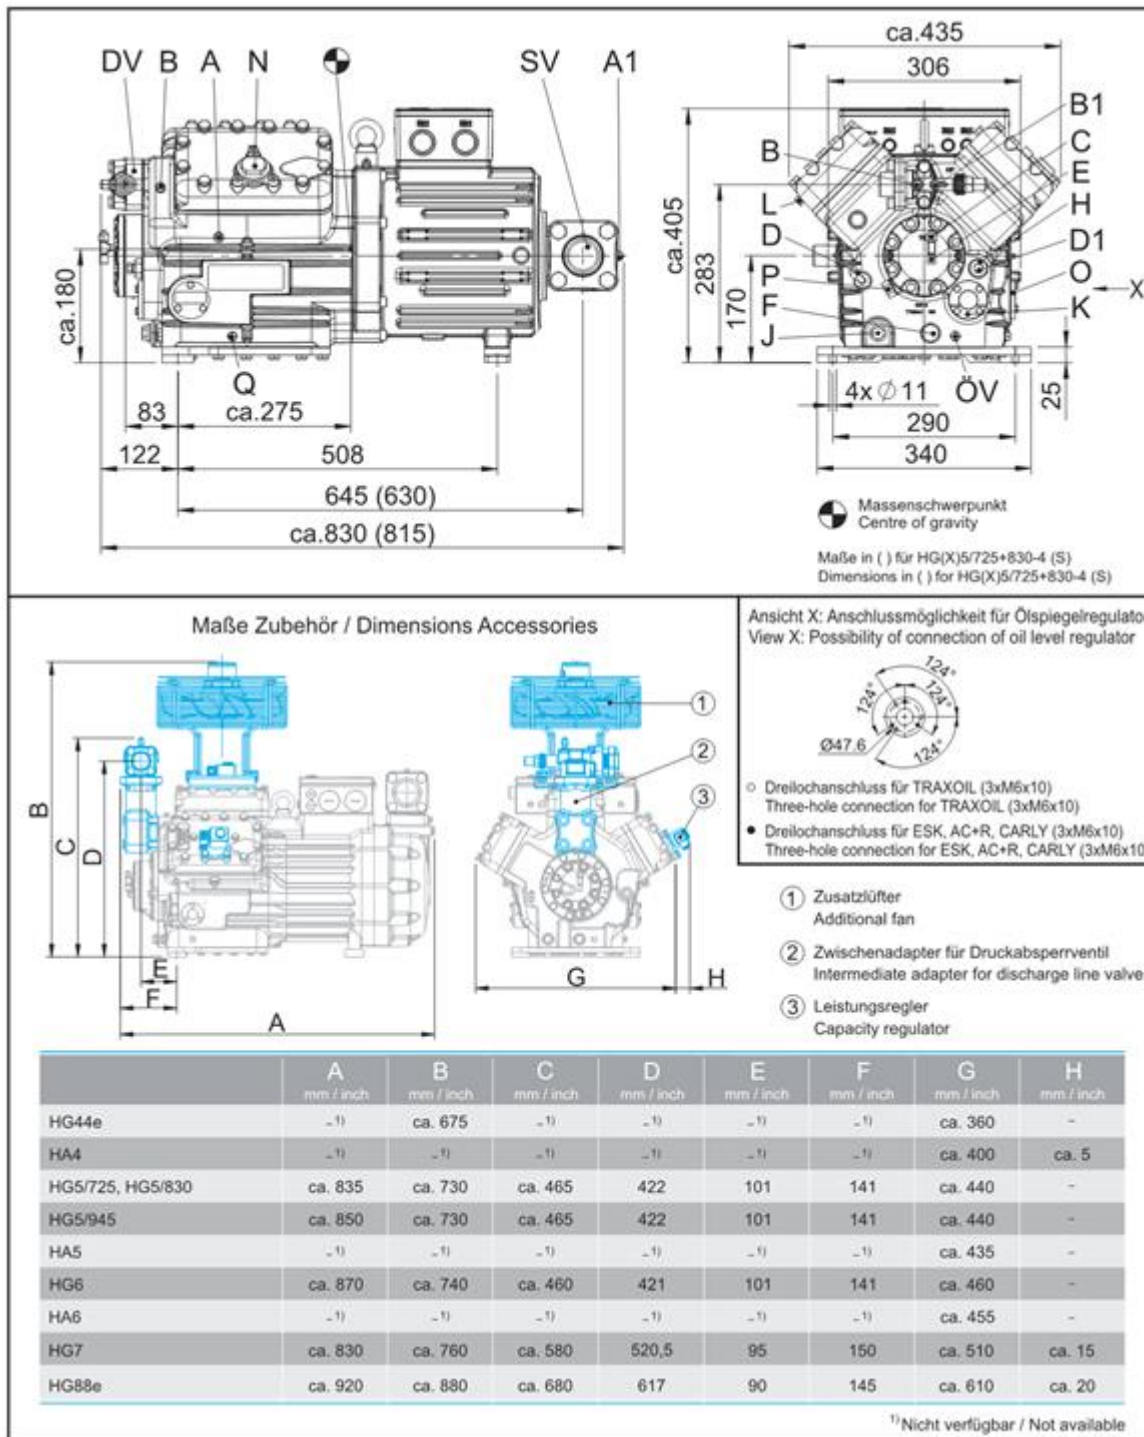

Subject to change without notice

To:

From:

04.02.2016
Page 7 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

SV	Suction line valve, tube \varnothing ¹⁾	54 mm - 2 1/8 "
DV	Discharge line valve, tube \varnothing ¹⁾	35 mm - 1 3/8 "
A	Connection suction side, not lockable	1/8 " NPTF
A1	Connection suction side, lockable	7/16 " UNF
B	Connection discharge side, not lockable	1/8 " NPTF
B1	Connection discharge side, lockable	7/16 " UNF
C	Connection oil pressure safety switch OIL	7/16 " UNF
D	Connection oil pressure safety switch LP	7/16 " UNF
D1	Connection oil return from oil separator	1/4 " NPTF
E	Connection oil pressure gauge	7/16 " UNF
F	Oil drain	M 22 x 1.5
H	Oil charge plug	M 22 x 1.5
J	Connection oil sump heater	M 22 x 1.5
K	Sight glass	-
L	Connection thermal protection thermostat	1/8 " NPTF
N	Connection capacity regulator	M 45 x 1.5
O	Connection oil level regulator	3 x M 6
ÖV	Connection oil service valve	1/4" NPTF
P	Connection oil differential pressure sensor	M 20 x 1.5
Q	Connection oil temperature sensor	1/8" NPTF

Notes

- 1) Brazing connection

Subject to change without notice

To:

From:

04.02.2016
Page 8 of 9

VAP 11.3.0 (online)

HGX5/945-4 S

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R404A, R507

Subject:

GEA Commercial Compressors



Product photo



Subject to change without notice

To:

From:

04.02.2016
Page 9 of 9

VAP 11.3.0 (online)